


Blanking Plug with 24° Taper / O-Ring (DKO) Type FI-VD ▪ Series L / S

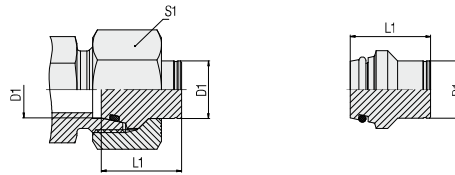

Ordering Codes

FI-VD-10*L*-B*-W3*-M

* Blanking Plug with 24° Taper / O-Ring (DKO)	FI-VD
* Outside Tube Diameter D1 (in mm)	-10
* Series	Light Series L Heavy Series S
* Seal Material	NBR (Buna-N®) -B FKM (Viton®) -V EPDM -E
* Material Code	Steel, zinc/nickel-plated -W3
Please contact STAUFF for alternative materials and surface finishings.	
* Assembling / Kitting	Blanking plug only — Blanking plug supplied with union nut -M

Connecting Parts



Union Nut
Type **FI-M**

Page 31

Spare Parts / Accessories



O-Ring
Type **O-RING**

Page 207

Series	Tube OD (mm/in)	PN (bar/psi)	Dimensions (mm/in)		Weight (g/lbs) ca. per 100 ²	Ordering Codes ³
			D1	L1 ¹		
L	6	500	17	14	0,55	FI-VD-06L/S-B-W3
	.24	7250	.67	.55	1,21	FI-VD-08L/S-B-W3
	8	500	17	17	0,91	FI-VD-10L/S-B-W3
	.31	7250	.67	.67	2,02	FI-VD-10L/S-B-W3
	10	500	20	19	1,55	FI-VD-12L/S-B-W3
	.39	7250	.79	.75	3,41	FI-VD-12L/S-B-W3
	12	400	21	22	2,23	FI-VD-15L-B-W3
	.47	5800	.83	.87	4,91	FI-VD-15L-B-W3
	15	400	20	27	3,60	FI-VD-18L-B-W3
	.59	5800	.79	1,06	7,92	FI-VD-18L-B-W3
	18	400	21	32	4,88	FI-VD-22L-B-W3
	.71	5800	.83	1,26	10,74	FI-VD-22L-B-W3
	22	250	23	36	7,70	FI-VD-28L-B-W3
	.87	3625	.91	1,42	16,94	FI-VD-28L-B-W3
	28	250	23	41	12,00	FI-VD-35L-B-W3
	1.10	3625	.91	1,61	26,40	FI-VD-35L-B-W3
	35	250	29	50	24,00	FI-VD-42L-B-W3
	1.38	3625	1,14	1,97	52,80	FI-VD-42L-B-W3
42	250	30	60	35,00	FI-VD-42L-B-W3	
1.65	3625	1,18	2,36	77,00		
S	6	800	17	17	0,55	FI-VD-06L/S-B-W3
	.24	11600	.67	.67	1,21	FI-VD-08L/S-B-W3
	8	800	17	19	0,91	FI-VD-10L/S-B-W3
	.31	11600	.67	.75	20,01	FI-VD-10L/S-B-W3
	10	800	20	22	1,55	FI-VD-12L/S-B-W3
	.39	11600	.79	.87	3,41	FI-VD-12L/S-B-W3
	12	630	21	24	2,23	FI-VD-14S-B-W3
	.47	9135	.83	.94	4,91	FI-VD-14S-B-W3
	14	630	23	27	3,30	FI-VD-16S-B-W3
	.55	9135	.91	1,06	7,26	FI-VD-16S-B-W3
	16	630	24	30	4,30	FI-VD-16S-B-W3
	.63	9135	.94	1,18	9,46	FI-VD-20S-B-W3
	20	400	28	36	8,10	FI-VD-20S-B-W3
	.79	5800	1,10	1,42	17,82	FI-VD-25S-B-W3
	25	400	31	46	13,50	FI-VD-25S-B-W3
	.98	5800	1,22	1,81	29,70	FI-VD-30S-B-W3
	30	400	34	50	21,20	FI-VD-30S-B-W3
	1.18	5800	1,34	1,97	46,64	FI-VD-38S-B-W3
38	400	38	60	36,90	FI-VD-38S-B-W3	
1.50	5800	1,50	2,36	81,18		

¹ Approximate dimension in assembled condition.

² Weight excluding union nut.

³ Standard scope of delivery: Blanking plug only.

Standard seal material is NBR (Buna-N®).

