


SW: Width across flats. All dimensions in mm (inch).

**Series RH-10 ■ BG 2 ■ Nominal Size 10**

Port A	Dimensions (mm/in)					Female Body Old Part Numbers STAUFF Ordering Codes	Weight (*9/16s) ca. per 100	Male Tip Old Part Numbers STAUFF Ordering Codes	Weight (*9/16s) ca. per 100
	ØD2	L1	L2	L3	L4				
<b>Male Thread with 24° Conical Bore - Shape W according to DIN 3861</b>									
	M14x1.5	8L	54 2.13	61 2.40	10 .39	RH08-1-L0814 QRC-RH-10-F-08L-S1-W3	20,80 45,86	RH08-2-L0814 QRC-RH-10-M-08L-BT-W3	31,80 70,11
	M16x1.5	10L	55 2.17	61 2.40	11 .43	RH08-1-L1016 QRC-RH-10-F-10L-S1-W3	21 46,30	RH08-2-L1016 QRC-RH-10-M-10L-BT-W3	32 70,55
	M18x1.5	12L	55 2.17	61 2.40	11 .43	RH08-1-L1218 QRC-RH-10-F-12L-S1-W3	21,20 46,74	RH08-2-L1218 QRC-RH-10-M-12L-BT-W3	32,20 70,99
	M22x1.5	15L	56 2.20	62 2.44	12 .47	RH08-1-L1522 QRC-RH-10-F-15L-S1-W3	22 48,50	RH08-2-L1522 QRC-RH-10-M-15L-BT-W3	32,90 72,53
	M18x1.5	10S	56 2.20	62 2.44	12 .47	RH08-1-S1018 QRC-RH-10-F-10S-S1-W3	21,50 47,40	RH08-2-S1018 QRC-RH-10-M-10S-BT-W3	32,60 71,87
	M20x1.5	12S	56 2.20	62 2.44	12 .47	RH08-1-S1220 QRC-RH-10-F-12S-S1-W3	22 48,50	RH08-2-S1220 QRC-RH-10-M-12S-BT-W3	33 72,75
	M22x1.5	14S	58 2.28	64 2.52	14 .55	RH08-1-S1422 QRC-RH-10-F-14S-S1-W3	22,70 50,04	RH08-2-S1422 QRC-RH-10-M-14S-BT-W3	33,80 74,52
	M24x1.5	16S	58 2.28	64 2.52	14 .55	RH08-1-S1624 QRC-RH-10-F-16S-S1-W3	23 50,71	RH08-2-S1624 QRC-RH-10-M-16S-BT-W3	33,90 74,74

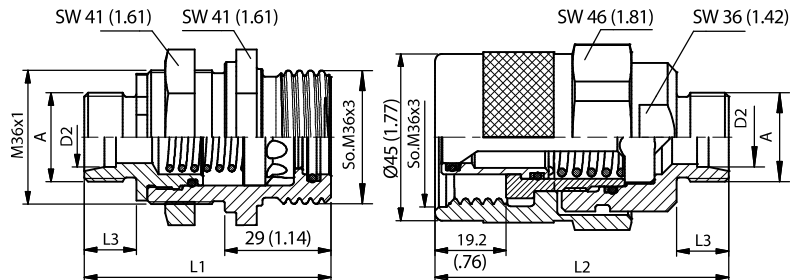

SW: Width across flats. All dimensions in mm (inch).

**RH/RK**
**Series RH-12 ■ BG 3 ■ Nominal Size 12,5**

Port A	Dimensions (mm/in)					Female Body Old Part Numbers STAUFF Ordering Codes	Weight (*9/16s) ca. per 100	Male Tip Old Part Numbers STAUFF Ordering Codes	Weight (*9/16s) ca. per 100
	ØD2	L1	L2	L3	L4				
<b>Male Thread with 24° Conical Bore - Shape W according to DIN 3861</b>									
	M22x1.5	15L	65 2.56	78 3.07	12 .47	RH12-1-L1522 QRC-RH-12-F-15L-S1-W3	31,20 68,78	RH12-2-L1522 QRC-RH-12-M-15L-BT-W3	56,40 124,34
	M24x1.5	16S	67 2.64	80 3.15	14 .55	RH12-1-S1624 QRC-RH-12-F-16S-S1-W3	32 70,55	RH12-2-S1624 QRC-RH-12-M-16S-BT-W3	57,30 126,32
	M30x2	20S	69,5 2.74	81,2 3.20	16 .63	RH12-1-S2030 QRC-RH-12-F-20S-S1-W3	34,80 76,72	RH12-2-S2030 QRC-RH-12-M-20S-BT-W3	59,50 131,18

Note: The connection of the two halves of a coupling is achieved depending on the type. It is important to observe the positive engagement of plug-type couplings and the secure tightening of screw-type couplings to the limit stop of the thread. Forced or improper separation will result in malfunction of the coupling.

