


PVV3 DN25 - BG 5 - ISO 25 (E)


THREADS	CH2	L2	CH3	L3	L4	ØT	F	STANDARD	FEMMINA - FEMALE - MUFFE - FEMELLE			MASCHIO - MALE - STECKER - MALE		
									COD. F	Weight (g)	Packaging (pcs.)	COD. M	Weight (g)	Packaging (pcs.)
IG 1	41	100	41	87.5			BSP 3/4"	DIN 3852-2-X	PVV3.2519.112	837	10	PVV3.2519.113 E	760	18
	41	100	41	87.5			NPT 3/4"	ANSI B1.20.3	PVV3.2519.012	844	10	PVV3.2519.013 E	767	18
	41	100	41	87.5			RC 3/4"	UNI ISO 7/1	PVV3.2519.042	844	10	PVV3.2519.043 E	766	18
	41	100	41	87.5			BSP 1"	DIN 3852-2-X	PVV3.2525.112	782	10	PVV3.2525.113 E	705	18
	41	100	41	87.5			NPT 1"	ANSI B1.20.3	PVV3.2525.012	795	10	PVV3.2525.013 E	717	18
	41	100	41	87.5			M30x1.5	ISO 6149-1	PVV3.2530.102	810	10	PVV3.2530.103 E	732	18
IG 2	41	100	41	87.5			1"1/16-12 UN 2B	SAE J 1926-1	PVV3.2527.032	831	10	PVV3.2527.033 E	753	18
	41	100	41	87.5			1"5/16-12 UN 2B	SAE J 1926-1	PVV3.2533.032	772	10	PVV3.2533.033 E	695	18
AG 2	41	104.1	41	91.6	23.1		1"5/16-12 UN 2A	SAE J 514	PVV3.2533.302	771	10	PVV3.2533.303 E	694	18
AGS 2	41	126.4	41	113.9	45.4		1"5/16-12 UN 2A	SAE J 514	PVV3.2533.502	869	10	PVV3.2533.503 E	791	10
AG 5	41	102	41	89.5	18		BSP 1"	DIN 3852-2-B	PVV3.2525.212	780	10	PVV3.2525.213 E	702	18
	41	100	41	87.5	16		BSP 3/4"	DIN 3852-2-A	PVV3.2519.712	755	10	PVV3.2519.713 E	678	18
	41	102	41	89.5	18		BSP 1"	DIN 3852-2-A	PVV3.2525.712	781	10	PVV3.2525.713 E	704	18
AG 3	41	93	41	80.5	12	18L	M26x1.5	ISO 8434-1-L	PVV3.2526.302	732	10	PVV3.2526.303 E	655	18
	41	95	41	82.5	14	22L	M30x2	ISO 8434-1-L	PVV3.2530.302	737	10	PVV3.2530.303 E	660	18
	41	95	41	82.5	14	28L	M36x2	ISO 8434-1-L	PVV3.2536.302	742	10	PVV3.2536.303 E	665	18
	46	97	46	84.5	16	35L	M45x2	ISO 8434-1-L	PVV3.2545.302	831	10	PVV3.2545.303 E	753	18
	41	97	41	84.5	16	20S	M30x2	ISO 8434-1-S	PVV3.2530.402	748	10	PVV3.2530.403 E	671	18
	41	99	41	86.5	18	25S	M36x2	ISO 8434-1-S	PVV3.2536.402	771	10	PVV3.2536.403 E	693	18
	46	101	46	88.5	20	30S	M42x2	ISO 8434-1-S	PVV3.2542.402	852	10	PVV3.2542.403 E	774	18
	55	103	55	90.5	22	38S	M52x2	ISO 8434-1-S	PVV3.2552.402	1039	10	PVV3.2552.403 E	962	18
AGS 3	41	115	41	102.5	34	18L	M26x1.5	ISO 8434-1-L	PVV3.2526.502	820	10	PVV3.2526.503 E	743	10
	41	115	41	102.5	34	22L	M30x2	ISO 8434-1-L	PVV3.2530.502	846	10	PVV3.2530.503 E	768	10
	41	115	41	102.5	34	28L	M36x2	ISO 8434-1-L	PVV3.2536.502	883	10	PVV3.2536.503 E	806	10
	46	121	46	108.5	40	35L	M45x2	ISO 8434-1-L	PVV3.2545.502	1098	10	PVV3.2545.503 E	1020	10
	41	117	41	104.5	36	20S	M30x2	ISO 8434-1-S	PVV3.2530.602	863	10	PVV3.2530.603 E	785	10
	41	119	41	106.5	38	25S	M36x2	ISO 8434-1-S	PVV3.2536.602	924	10	PVV3.2536.603 E	847	10
	46	121	46	108.5	40	30S	M42x2	ISO 8434-1-S	PVV3.2542.602	1034	10	PVV3.2542.603 E	956	10
	55	134	55	121.5	53	38S	M52x2	ISO 8434-1-S	PVV3.2552.602	1430	10	PVV3.2552.603 E	1353	10

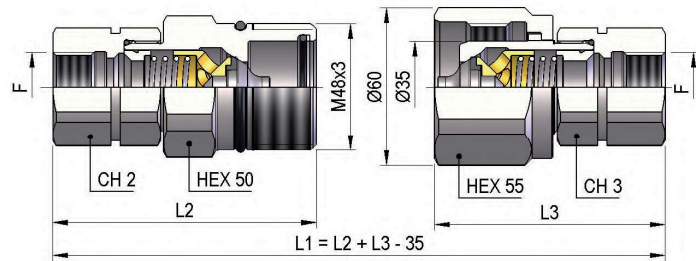